



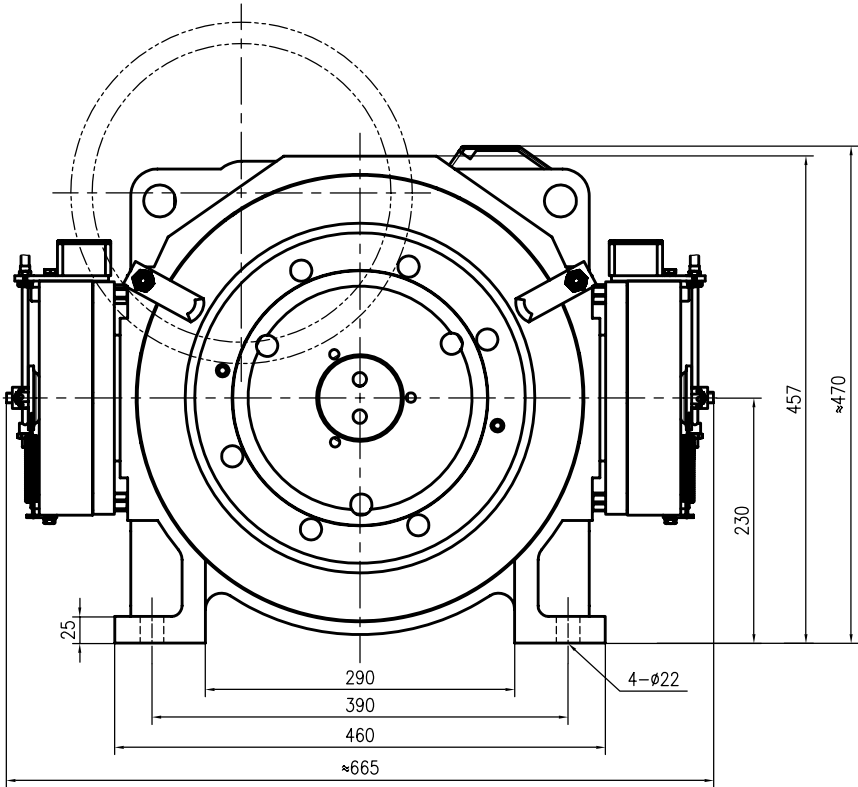

► GTW7A
电梯曳引机
ELEVATOR TRACTION MACHINE

电源电压	Voltage : 380V
悬挂比	Suspension : 2 : 1
FZD10 制动器	Brake : DC110V 2×0.84A (2×1.1A)
自重	Weight : 200kg
最大静态载荷	Max.Static Load : 2000kg

规格号 Spec	载重 Load (kg)	梯速 Lift Speed (m/s)	推荐高度 Height (m)	曳引轮直径 Sheave Diam(mm)	绳轮 Rope Sheave (mm)	额定电流 Current (A)	额定转矩 Torque (Nm)	额定转速 Rated Speed (rpm)	额定频率 Frequency (Hz)	功率 Power (kW)	极数 Pole	工作制 Rating	绝缘等级 INS.Class	防护等级 IP Code
GTW7A-31P0	320	1	≤80	Φ325	3xΦ8x12	6.3	200	118	31.5	2.5	32	S5(40%)	F	IP41
GTW7A-31P5	320	1.5	≤80	Φ325	3xΦ8x12	8.9	200	177	47.2	3.7	32	S5(40%)	F	IP41
GTW7A-31P6	320	1.6	≤80	Φ325	3xΦ8x12	8.9	200	189	50.4	4	32	S5(40%)	F	IP41
GTW7A-31P7	320	1.75	≤80	Φ325	3xΦ8x12	9.4	200	206	54.9	4.3	32	S5(40%)	F	IP41
GTW7A-41P0	450	1	≤80	Φ325	4xΦ8x12	8.3	265	118	31.5	3.3	32	S5(40%)	F	IP41
GTW7A-41P5	450	1.5	≤80	Φ325	4xΦ8x12	11.7	265	177	47.2	4.9	32	S5(40%)	F	IP41
GTW7A-41P6	450	1.6	≤80	Φ325	4xΦ8x12	11.7	265	189	50.4	5.2	32	S5(40%)	F	IP41
GTW7A-41P7	450	1.75	≤80	Φ325	4xΦ8x12	12.5	265	206	54.9	5.7	32	S5(40%)	F	IP41
GTW7A-50P6	550	0.63	≤80	Φ325	5xΦ8x12	5.6	290	74	19.7	2.2	32	S5(40%)	F	IP41
GTW7A-50P7	550	0.75	≤80	Φ325	5xΦ8x12	8.1	290	88	23.5	2.7	32	S5(40%)	F	IP41
GTW7A-51P0	550	1	≤80	Φ325	5xΦ8x12	8.1	290	118	31.5	3.6	32	S5(40%)	F	IP41
GTW7A-51P5	550	1.5	≤80	Φ325	5xΦ8x12	12.2	290	177	47.2	5.4	32	S5(40%)	F	IP41
GTW7A-51P6	550	1.6	≤80	Φ325	5xΦ8x12	12.2	290	189	50.4	5.7	32	S5(40%)	F	IP41
GTW7A-51P7	550	1.75	≤80	Φ325	5xΦ8x12	13.2	290	206	54.9	6.3	32	S5(40%)	F	IP41
GTW7A-60P6	630	0.63	≤80	Φ325	5xΦ8x12	6.3	325	74	19.7	2.5	32	S5(40%)	F	IP41
GTW7A-60P7	630	0.75	≤80	Φ325	5xΦ8x12	9	325	88	23.5	3	32	S5(40%)	F	IP41
GTW7A-61P0	630	1	≤80	Φ325	5xΦ8x12	9	325	118	31.5	4	32	S5(40%)	F	IP41
GTW7A-61P5	630	1.5	≤80	Φ325	5xΦ8x12	13.6	325	177	47.2	6	32	S5(40%)	F	IP41
GTW7A-61P6	630	1.6	≤80	Φ325	5xΦ8x12	13.6	325	189	50.4	6.4	32	S5(40%)	F	IP41
GTW7A-61P7	630	1.75	≤80	Φ325	5xΦ8x12	14.8	325	206	54.9	7	32	S5(40%)	F	IP41

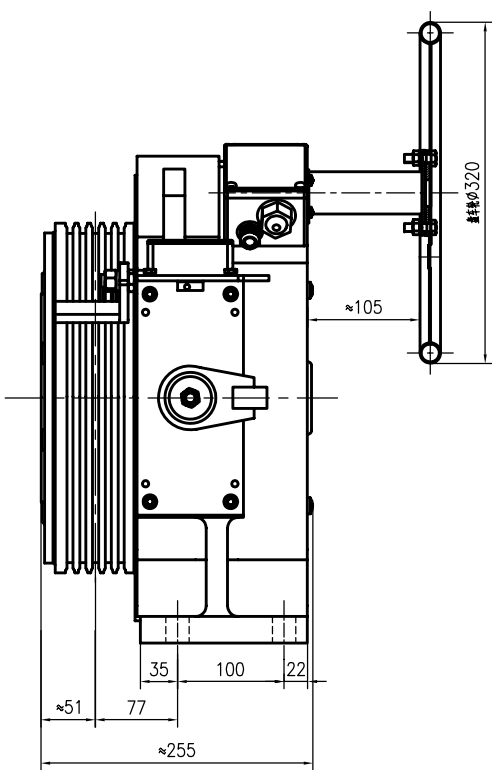

注

- 1. 本机型可选配盘车装置和 4 米长的远程手动松闸装置。
- 2. 当本机型用于额定载重为 630kg 时，电梯的平衡系数不应小于 0.47。
- 3. 在本机型用于额定载重大于 450kg 时，制动器电流为 2×0.84A；当额定载重大于 450kg 时，制动器电流为 2×1.1A。
- 4. 推荐高度值仅供参考，超出推荐高度和工作制时，请联系我司技术接口确认。

REMARK

- 1.The machine can be configured with the handwheel and the remote manual brake release which is 4m.
- 2.When this machine is used for loading 630kg,the coefficient of elevator balance system shouldn't be less than 0.47.
- 3.When this machine is used for loading≤450kg,the current of brakes are 2×0.84A; when this machine is used for loading > 450kg,the current of brakes are 2×1.1A.
- 4.The recommended height is for reference only. Please contact our technical interface for confirmation when it exceeds the recommended height and the rating.